





SHIELDED TRANSITION COUPLINGS

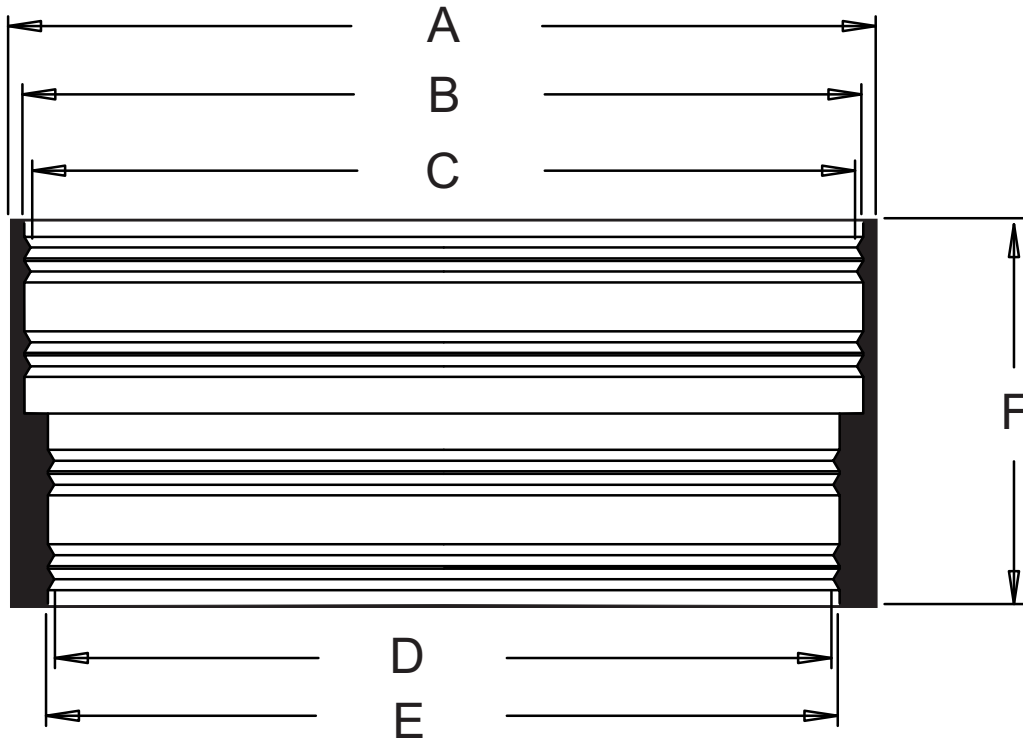

DIMENSIONS IN INCHES


SIZE	TRANSITION	BMI#	Bands	A	B	C	D	E	F
1 1/2"	CI/PLT/STL x CI/PLT/STL	61008	2	2.20	-	-	1.95	2.01	2.13
3"	CI/PLT/STL x CI	61011	2	3.77	3.58	3.52	3.37	3.43	2.13
4"	CI/PLT/STL x CI	61012	2	4.69	4.50	4.44	4.36	4.42	2.13
5"	CI/PLT/STL x CI	61052	4	5.78	5.50	5.44	5.18	5.24	3.00
6"	CI/PLT/STL x CI	61014	4	6.85	6.62	6.52	6.15	6.25	3.00
8"	CI/PLT/STL x CI	61015	4	8.83	8.56	8.50	8.31	8.37	4.00

Parts	Dimensions	Materials
Band	0.024" x 0.55"	SS 304
Band screw	5/16"	SS 304L
Screw housing	0.037" thick	SS 304
Shield	0.012" thick	SS 301
Flexible coupling	-	Neoprene




Parts	Dimensions
Screw torque	60 in-lb
Test pressure	4.3 PSI (29.6 KPA)
Working temperature	-30° F to 180° F



Certified and complies with:
- ANSI / ASTM C564
- ANSI / ASTM C1460
- CSA B602



SHIELDED TRANSITION COUPLINGS

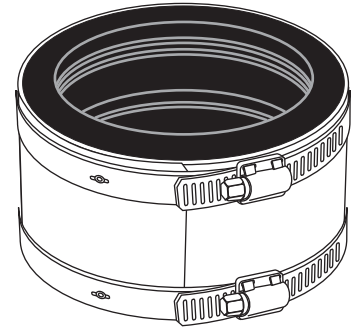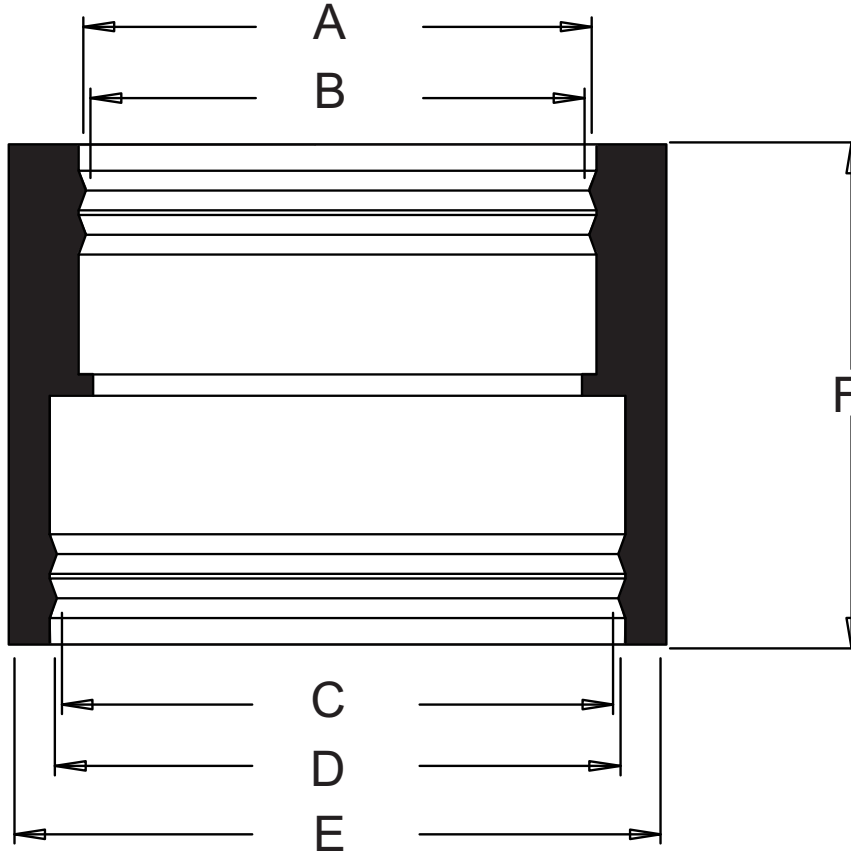

DIMENSIONS IN INCHES


SIZE	TRANSITION	BMI#	Bands	A	B	C	D	E	F
1 1/2"	CI/PLT/STL x CU	61068	2	1.70	1.64	1.95	2.01	2.20	2.13
2"	CI x CU	61069	2	2.14	2.08	2.32	2.38	2.72	2.13
3"	CI x CU	61071	2	3.12	3.06	3.32	3.38	3.77	2.13
4"	CI x CU	61072	2	4.13	4.07	4.32	4.38	4.74	2.13
3" x 2"	CI x CU	61076	2	2.14	2.08	3.32	3.38	3.77	2.13
4" x 3"	CI x CU	61088	2	3.13	3.07	4.36	4.42	4.74	2.13

Parts	Dimensions	Materials
Band	0.024" x 0.55"	SS 304
Band screw	5/16"	SS 304L
Screw housing	0.037" thick	SS 304
Shield	0.012" thick	SS 301
Flexible coupling	-	Neoprene




Parts	Dimensions
Screw torque	60 in-lb
Test pressure	4.3 PSI (29.6 KPA)
Working temperature	-30° F to 180° F



Certified and complies with:
- ANSI / ASTM C564
- ANSI / ASTM C1460
- CSA B602

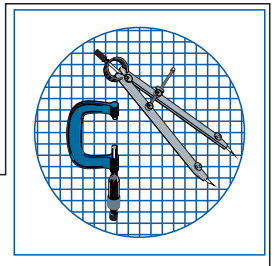

SHIELDED TRANSITION COUPLINGS

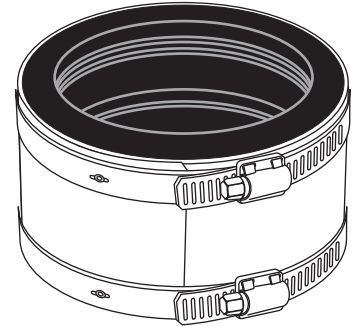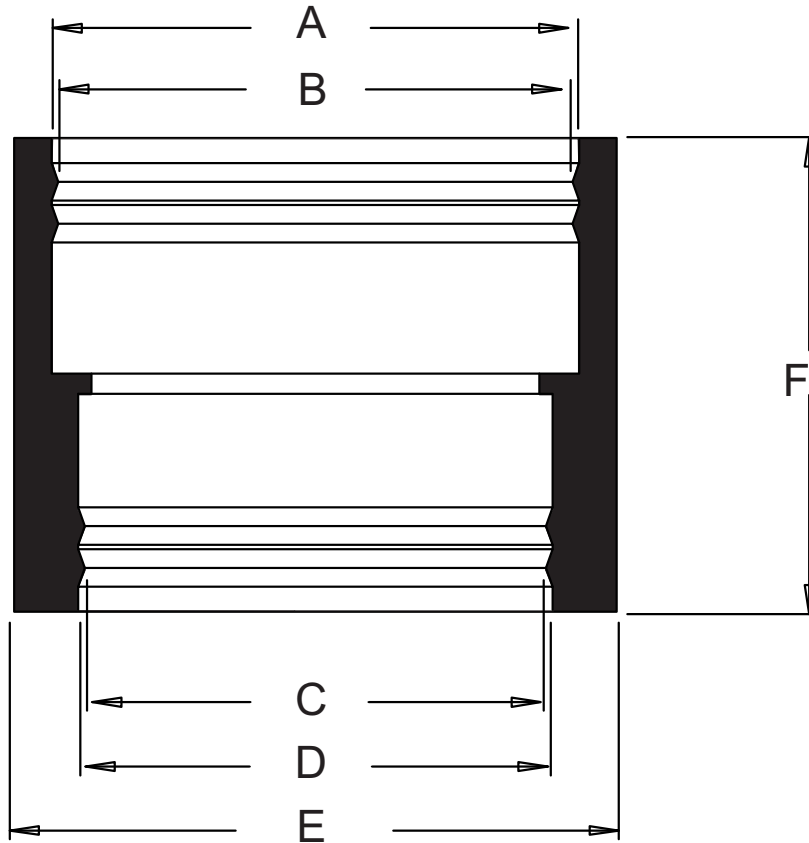

DIMENSIONS IN INCHES


SIZE	TRANSITION	BMI#	Bands	A	B	C	D	E	F
2" x 1 1/2"	CI/PLT/STL x CU	61090	2	2.47	2.41	1.66	1.72	2.72	2.13
1 1/2"	CI/PLT/STL x TUBE	61091	2	2.01	1.95	1.54	1.60	2.20	2.13
2" x 1 1/2"	CI/PLT/STL x TUBE	61092	2	2.46	2.40	1.54	1.60	2.80	2.13

Parts	Dimensions	Materials
Band	0.024" x 0.55"	SS 304
Band screw	5/16"	SS 304L
Screw housing	0.037" thick	SS 304
Shield	0.012" thick	SS 301
Flexible coupling	-	Neoprene




Parts	Dimensions
Screw torque	60 in-lb
Test pressure	4.3 PSI (29.6 KPA)
Working temperature	-30° F to 180° F



Certified and complies with:
- ANSI / ASTM C564
- ANSI / ASTM C1460
- CSA B602



EPVC FLEXIBLE COUPLINGS

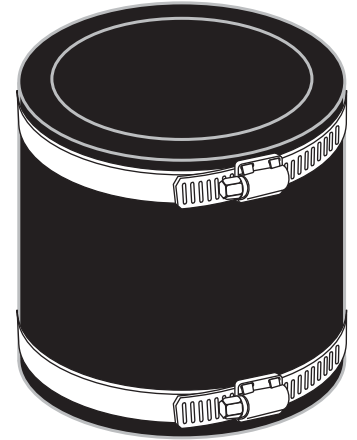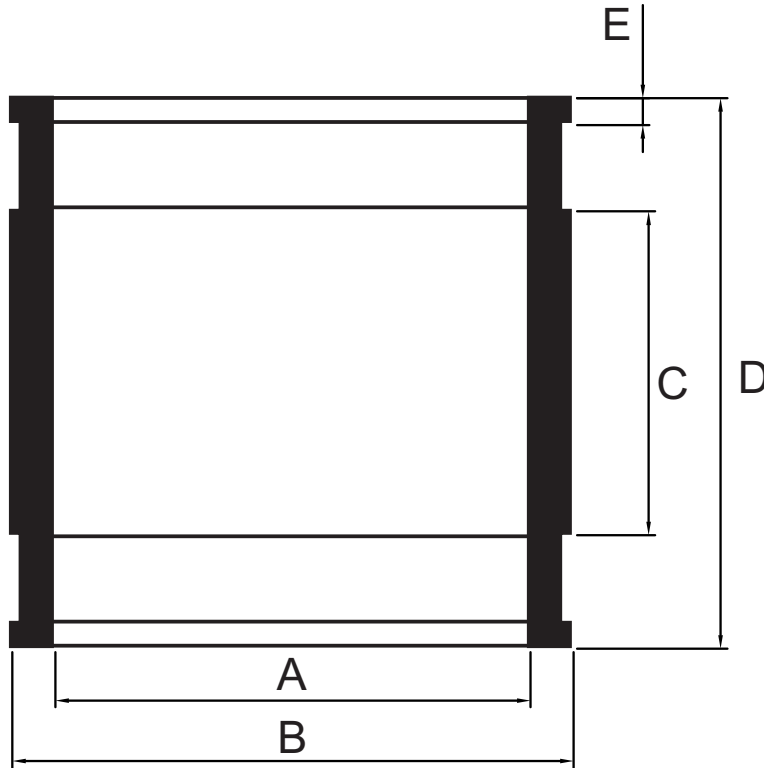

DIMENSIONS IN INCHES


SIZE	FLEXIBLE COUPLING	BMI#	Bands	A	B	C	D	E
1 1/2"	CI/PLST x CI/PLST	61108	2	1.97	2.36	1.77	3.46	0.20
2"	CI/PLST x CI/PLST	61109	2	2.48	2.91	1.77	3.46	0.20
3"	CI/PLST x CI/PLST	61111	2	3.46	4.09	2.28	4.06	0.20
4"	CI/PLST x CI/PLST	61112	2	4.57	5.12	2.28	4.06	0.20
6"	CI/PLST x CI/PLST	61114	2	6.61	7.20	4.25	5.98	0.20

Parts	Dimensions	Materials
Band	0.024" x 0.55"	SS 304
Band screw	5/16"	SS 304L
Screw housing	0.037" thick	SS 304
Flexible coupling	-	Elastomeric material




Parts	Dimensions
Screw torque	60 in-lb
Test pressure	4.3 PSI (29.6 KPA)
Working temperature	-30° F to 180° F



Certified and complies with:
- ANSI / ASTM C1173
- CSA B602

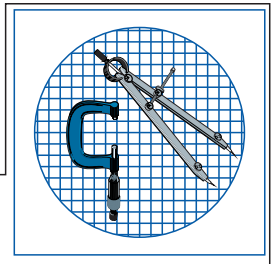

EPVC FLEXIBLE COUPLINGS

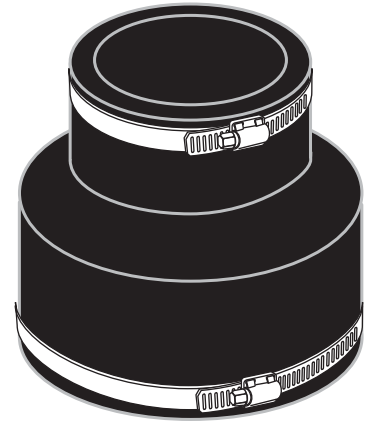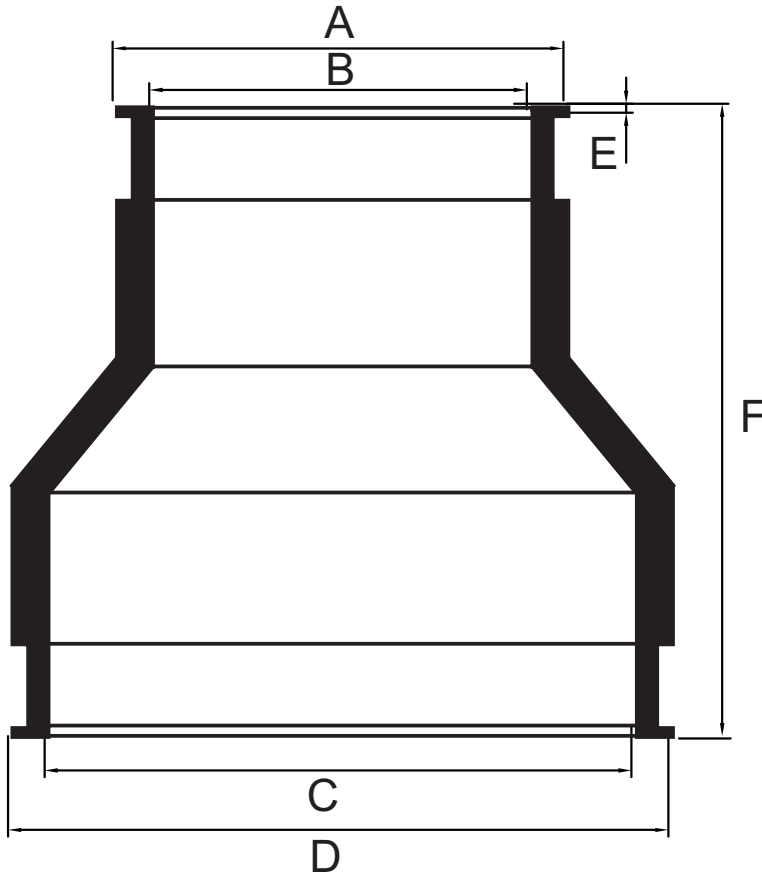

DIMENSIONS IN INCHES


SIZE	REDUCING FLEXIBLE COUPLING	BMI#	Bands	A	B	C	D	E	F
1 1/2 x 1 1/4	CI/PLST x CI/PLST	61135	2	2.05	1.61	1.97	2.36	0.20	3.46
2" x 1 1/2"	CI/PLST x CI/PLST	61140	2	2.36	1.97	2.48	2.91	0.20	3.46
3" x 2"	CI/PLST x CI/PLST	61152	2	2.91	2.48	3.46	4.09	0.20	3.46
3" x 1 1/2"	CI/PLST x CI/PLST	61153	2	2.36	1.97	3.46	4.09	0.20	3.46
4" x 3"	CI/PLST x CI/PLST	61156	2	4.09	3.46	4.57	5.12	0.20	3.46
4" x 2"	CI/PLST x CI/PLST	61158	2	2.91	2.48	4.57	5.12	0.20	3.46
4" x 1 1/2"	CI/PLST x CI/PLST	61159	2	2.36	1.97	4.57	5.12	0.20	3.46
6" x 4"	CI/PLST x CI/PLST	61170	2	5.12	4.57	6.61	7.20	0.20	5.98

Parts	Dimensions	Materials
Band	0.024" x 0.55"	SS 304
Band screw	5/16"	SS 304L
Screw housing	0.037" thick	SS 304
Flexible coupling	-	Elastomeric material




Parts	Dimensions
Screw torque	60 in-lb
Test pressure	4.3 PSI (29.6 KPA)
Working temperature	-30° F to 180° F



Certified and complies with:
- ANSI / ASTM C1173
- CSA B602

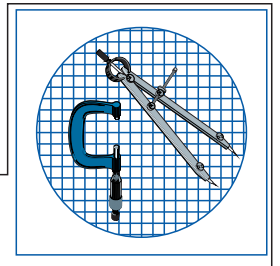

RUBBER FLEXIBLE CAPS

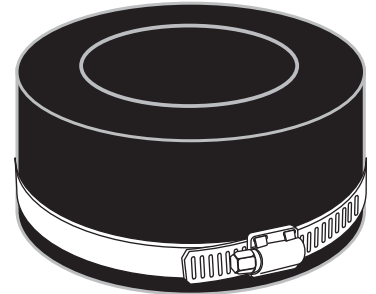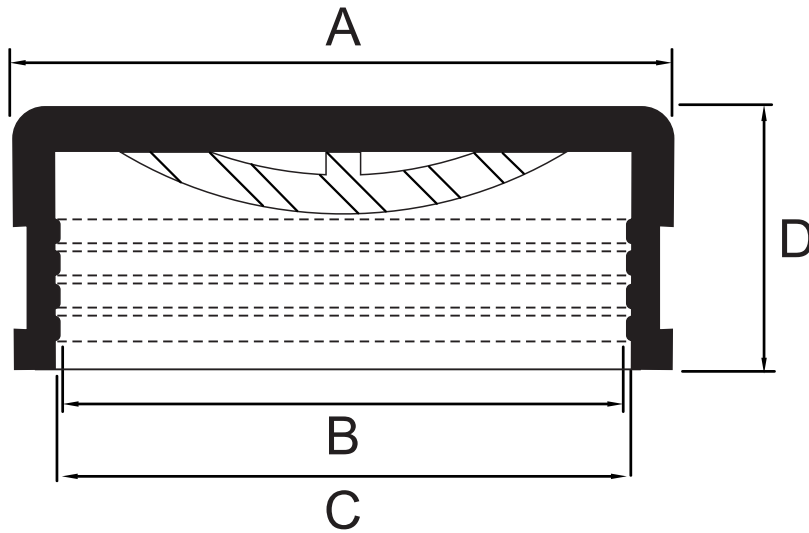

DIMENSIONS IN INCHES

SIZE	FLEXIBLE CAPS	BMI#	Bands	A	B	C	D
1 1/2"	CI/PLST	61508	1	2.27	1.81	1.89	1.50
2"	CI/PLST	61509	1	2.72	2.23	2.33	1.50
3"	CI/PLST	61511	1	3.98	3.44	3.51	1.58
4"	CI/PLST	61512	1	5.00	4.48	4.58	1.55
6"	CI/PLST	61514	1	7.05	6.50	6.65	2.23

Parts	Dimensions	Materials
Band	0.024" x 0.55"	SS 304
Band screw	5/16"	SS 304L
Screw housing	0.037" thick	SS 304
Flexible coupling	-	Elastomeric material

Parts	Dimensions
Screw torque	60 in-lb
Test pressure	4.3 PSI (29.6 KPA)
Working temperature	-30° F to 180° F